


DC miniature circuit breaker-FTBD


Product illustration:

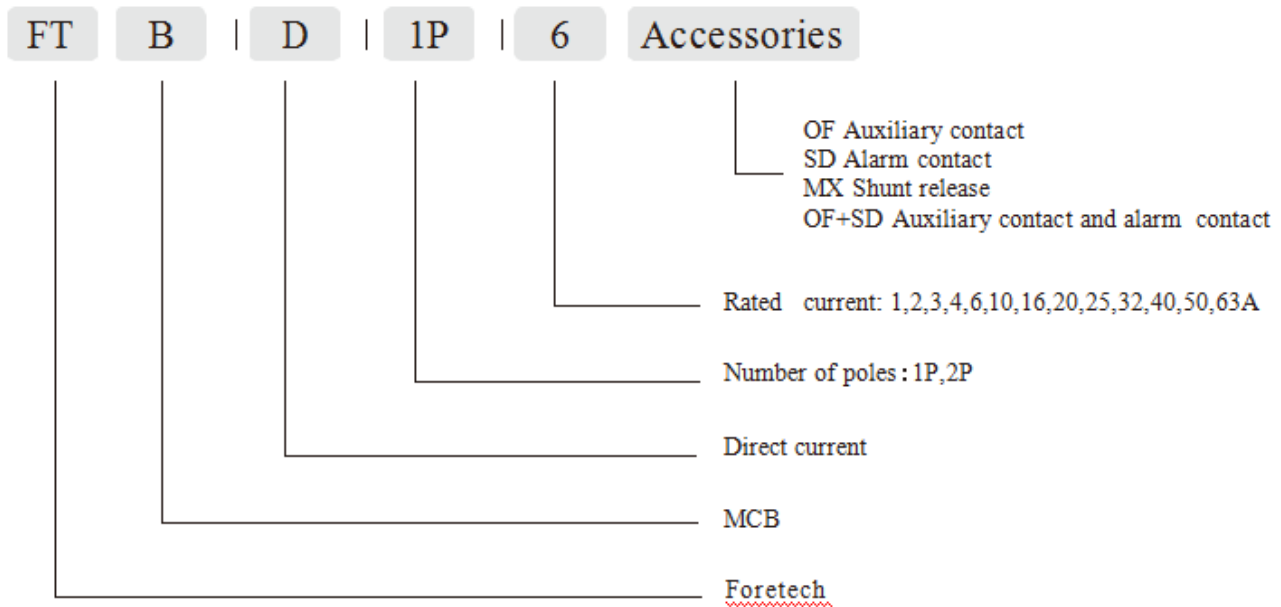


Technical Data

Model	FTBD DC miniature circuit-breaker	
Picture		
Number of poles	1P	2P
Rated frequency:	AC 50/60Hz	
Rated voltage (V)	125/250	250/500
Rated current (A)	1, 2, 3, 4	
Rated ultimate short-circuit breaking capacity(KA)	6.5	
Rated current (A)	6, 10, 16, 20, 25, 32, 40, 50, 63	
Rated ultimate short-circuit breaking capacity(KA)	20/10	20/10
Rated impulse withstand voltage Uimp(KV)	4	
Mechanical and electrical life:	20000	
Protection rating	IP20	
Installation	On DIN rail 35mm according to JB6525	
Connection capacity:	Cross-section of conductors up to 25mm ² , Cross-section of busbar from 0.8-2mm ²	
Ambient temperature (°C)	-25°C ~ +45°	
Altitude (m)	?4000m	
Relative air humidity	no more than 95%	
Pollution degree	?	
Installation condition	Used in place without obvious shock and vibration	
Weight (g)	116	232

Tripping characteristic

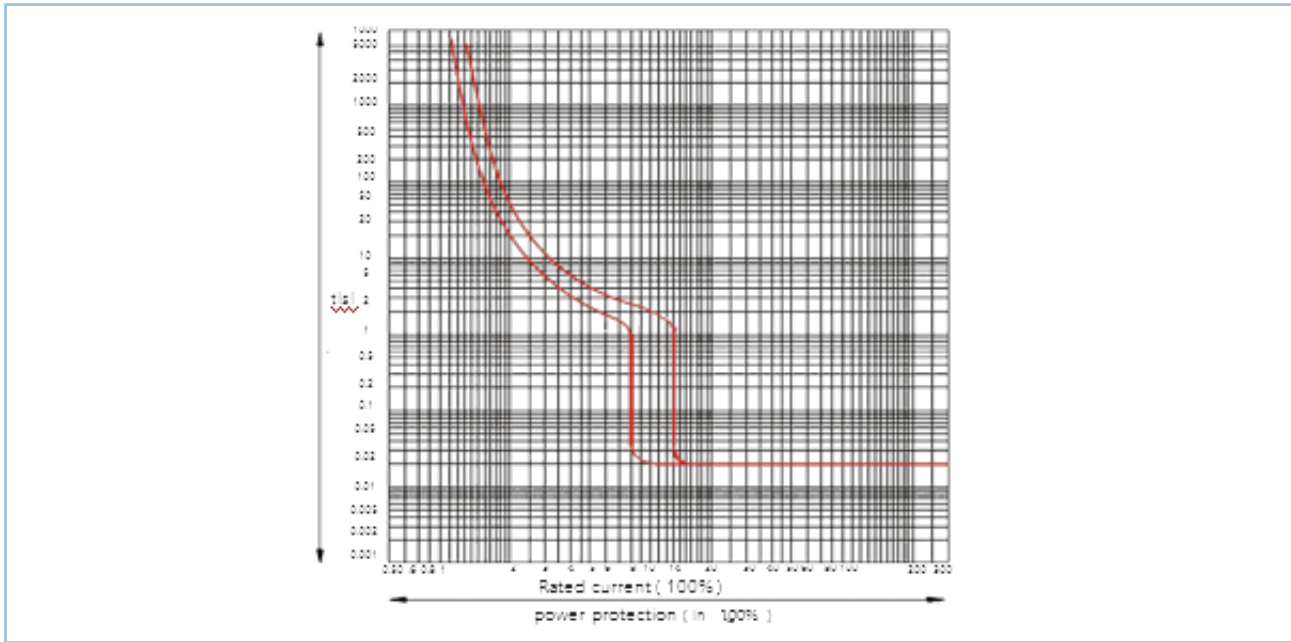

Exterior and dimensions

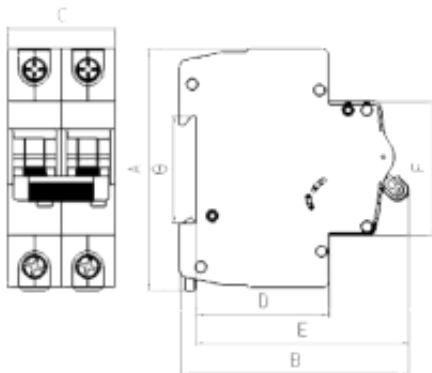

Number of poles	1P 2P	
A	80±0.8	
B	74.2±0.8	75.7±0.8
C	17.8±0.8	35.6±0.8
D	44±0.8	
E	68.7±0.8	70.2±0.8
F	45±0.8	
G	35.5±0.8	



Product link : <http://www.foretechgroup.com/it/?p=853>