




■ Product illustration:


FT B 2 LE IP+N / C 6 AC 30 Accessories

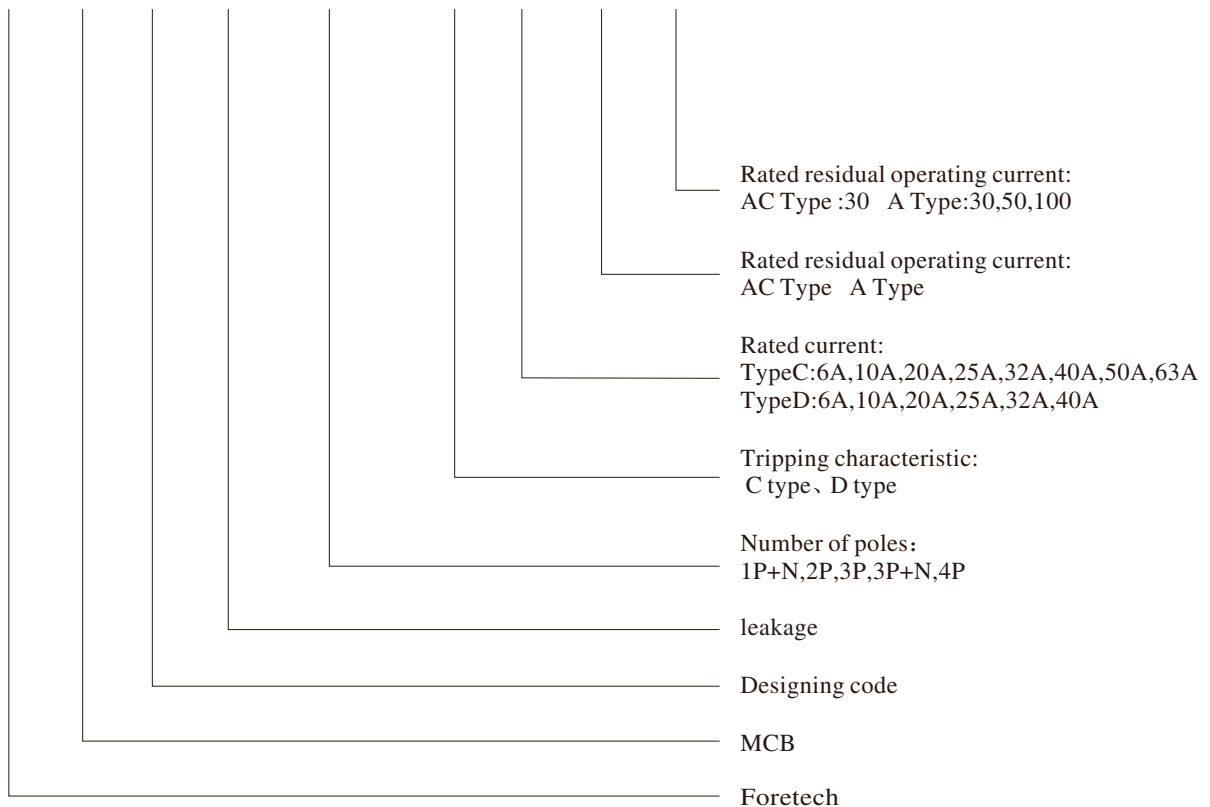

■ Technical Data

Model	FTB2LE Miniature circuit-breaker				
Number of poles	IP+N,2P,3P,3P+N,4P				
Rated frequency:	AC 50/60Hz				
Rated voltage (V) AC	230/400				
Rated current (A)	C	6, 10, 16, 20, 25, 32, 40, 50, 63			
	D	6, 10, 16, 20, 25, 32, 40			
Rated residual operating current(mA)	AC	30			
	A	30,50,100			
Rated residual non-operating current(mA)	AC	15			
	A	15,25,50			
Residual current breaking time	$30\text{mA} \leq 0.1\text{s}$ $250\text{mA} \leq 0.04\text{s}$				
Max. breaking time(s)	0.1				
Rated short-circuit breaking capacity(KA)	6.5				
Rated residual current breaking capacity(KA)	4.5				
Mechanical & electrical life:	20,000 operations				
Protection rating	IP20				
Installation	On DIN rail 35mm according to JB6525				
Connection capacity:	Cross-section of conductors up to 25mm ² , Cross-section of busbar from 0.8-2mm ² , reversibility of connections				
Tightening torque	2 Nm				
Ambient temperature (°C)	-5°C ~ +40°C				
Altitude (m)	≤2000m				
Relative air humidity	no more than 95%				
Pollution degree	II				
Installation condition	Used in place without obvious shock and vibration				
Weight (g)	340	420	530	630	710

■ Exterior and dimensions

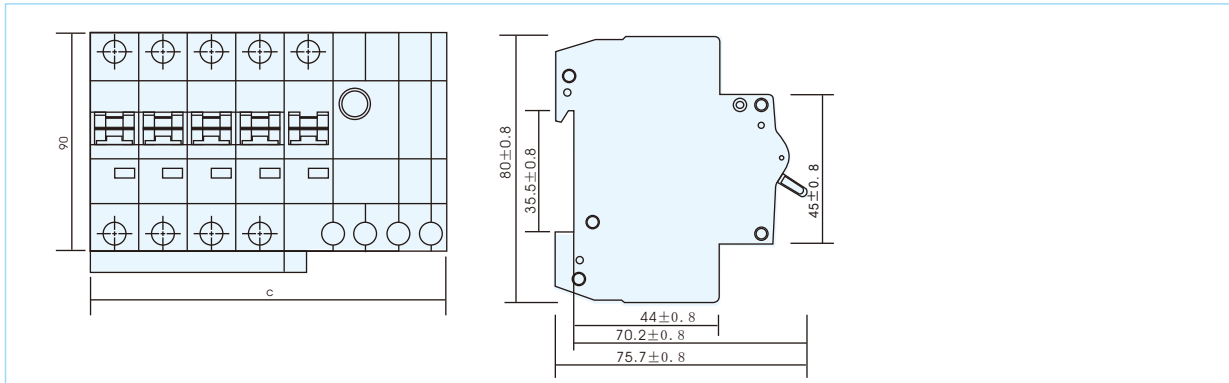

Number of poles	Width (mm)	Modules
1 / 2	54	3
2 / 2	72	4
3 / 3	100	5.5
3 / 4	112.5	6.25
4 / 4	130.5	7.25